

# Product Data Sheet

## Fluorotemp Slide Plates

### Benefits:



Insulated to allow highest design temperature  
 Highest temperature and load range  
 Custom-designed to your application's requirements  
 Manufactured in America

### Design Data:

Loading Range: 75 to 2,500psi  
 Maximum Design Temperature up to 1,000°F  
 Coefficient of friction: 0.10 to 0.04


### Specifications:

Glass Filled PTFE mechanically attached to backer plate  
 Designed to slide against a polished SS surface

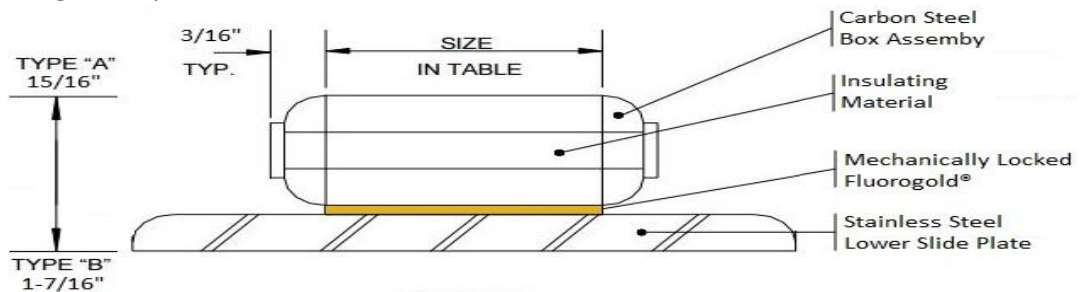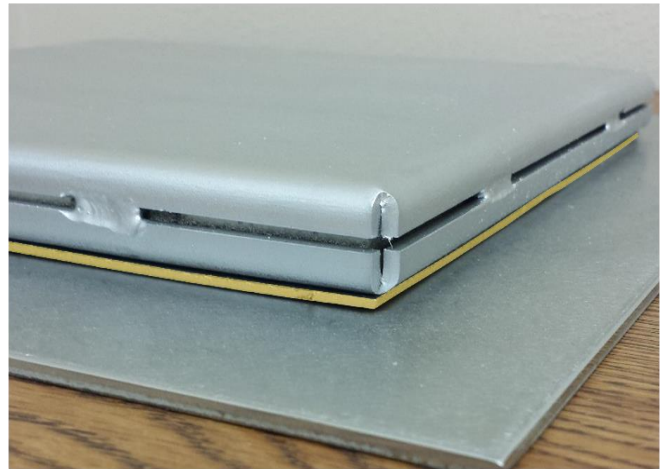

Type "A" for use up to 800°F, Type "B" for use up to 1000°F.

Upper Element Part No.	Size (W x L)	Maximum Load
FT-A-1	4" x 4"	40,000 lb
FT-B-1	4" x 4"	40,000 lb
FT-A-2	4" x 6"	60,000 lb
FT-B-2	4" x 6"	60,000 lb
FT-A-3	4" x 8"	80,000 lb
FT-B-3	4" x 8"	80,000 lb
FT-A-4	6" x 6"	90,000 lb
FT-B-4	6" x 6"	90,000 lb
FT-A-5	6" x 8"	120,000 lb
FT-B-5	6" x 8"	120,000 lb
FT-A-6	8" x 8"	160,000 lb
FT-B-6	8" x 8"	160,000 lb

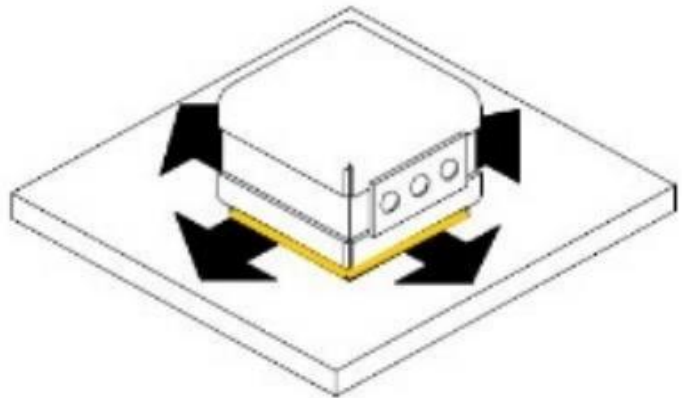

[www.grmcp.com](http://www.grmcp.com)

(936) 441-5910

11133 I-45 S. Suite Q

Conroe, TX 77302

Fluorogold® is a registered trademark of St. Gobain



Request a quote:

[sales@grmcp.com](mailto:sales@grmcp.com)

Design or specification help:

[eng@grmcp.com](mailto:eng@grmcp.com)